

marantz®



SR5013 7.2 CHANNEL FULL 4K NETWORK AV RECEIVER WITH HEOS MUSIC STREAMING



The Marantz SR5013 7.2 channel AV receiver offers immersive home theatre and high-resolution audio support. Enjoy multi-dimensional surround sound with the latest audio formats in Dolby Atmos, DTS:X and DTS Virtual:X. The SR5013 is fully compatible with the latest HDMI specifications, including 4K video, and lets you stream wireless music from your smart devices via Bluetooth, AirPlay 2 or the HEOS app.

Highlights

- 7.2 channel AV Receiver with 180W per channel
- Built-in WiFi with 2.4GHz/5GHz dual band support; built-in Bluetooth
- 4K/60 Hz full-rate pass-through, 4:4:4 color resolution, HDR and BT.2020, plus Dolby Vision compatibility and Hybrid Log Gamma (HLG)
- 8 HDMI inputs (incl. 1 front) with full HDCP 2.2 support; 2 HDMI outputs
- Analogue to HDMI conversion and SD/HD to 4K Upscaling
- Dolby Atmos (up to 5.1.2), DTS:X and DTS Virtual:X processing
- Audiophile 32-bit D/A converters; HDAM; Current Feedback circuitry
- AirPlay 2, Bluetooth, Internet Radio, Spotify Connect, Network Audio Streaming
- Integrated high-quality Phono input
- Amazon Alexa voice control via the HEOS Home Entertainment skill
- DSD (2.8/5.6MHz), FLAC, ALAC and WAV support
- Audyssey MultEQ XT, Dynamic Volume and Dynamic EQ
- Colour-coded speaker terminals, Setup Assistant, Marantz AVR Remote App
- Intelligent ECO mode with off/on/auto setting

Your Benefits


- Enough power to fill bigger rooms with renowned Marantz sound
- Improved network stability especially in WiFi-crowded homes
- Latest HDMI standard for future-proof compatibility
- Extended connectivity: ready to feed a TV and projector in parallel
- Full HD and even Ultra HD video quality from all sources
- Immersive 3D sound with effects from overhead
- For the most accurate and detailed audio reproduction
- Access to almost unlimited online music sources
- Connect your turntable and listen to your beloved Vinyls
- Control main functions of your AVR with your voice (not available in all countries)
- High Resolution audio streaming, even gapless
- Delivering perfect equalization for your individual room
- Hassle-free installation, setup and operation
- Energy-conscious without compromising on performance



because music matters

SR5013

7.2 CHANNEL FULL 4K NETWORK AV RECEIVER WITH HEOS MUSIC STREAMING

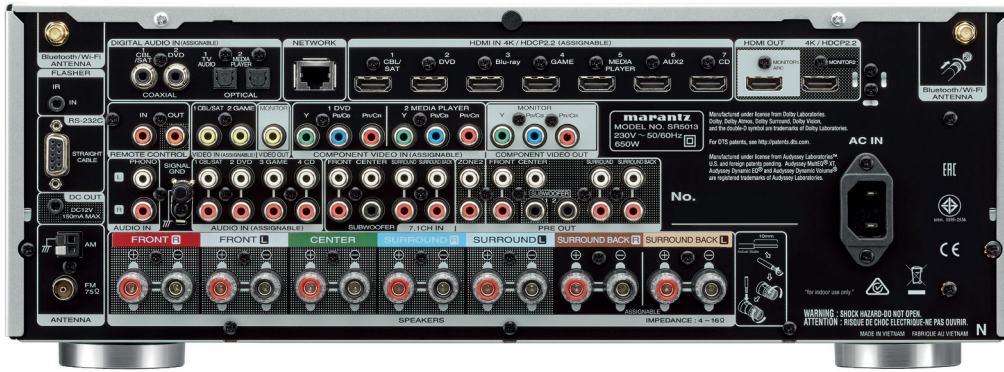

Design and specifications are subject to change by Marantz without notice.

FEATURES	SR5013
MULTICHANNEL SURROUND	
DTS HD Master / DTS:X / DTS Neural:X	• / • / •
DTS Virtual:X	•
Dolby TrueHD / Dolby Atmos / Dolby Surround	• / • / •
Multichannel Stereo	•
Compressed audio Enhancer: MDAx2	•
Audyssey	MultEQ XT
Audyssey Dynamic EQ / Dynamic Volume	• / •
Audyssey MultEQ Editor App support	•
NETWORK / SOURCES	
Network Audio Streaming	•
HEOS Multiroom integrated	•
Lossy formats MP3 / WMA / AAC	• / • / •
Lossless formats FLAC / ALAC / WAV	• / • / •
DSD Streaming	• (2.8 MHz / 5.6 MHz)
FLAC HD 192/24 / WAV 192/24 / ALAC 192/24	• / • / •
Gapless playback	• (FLAC, WAV, ALAC, DSD)
AirPlay2	•
Internet Radio (Tuneln)	•
Spotify Connect, Deezer, TIDAL, Napster, Soundcloud *	• / • / • / • / •
Compatible with Remote APP for Smart Phones	Android/iOS
Ethernet / Wi-Fi	• / • (dual antenna / dual band)
Network: (IP-control / update)	• / •
Front Inputs: HDMI / USB	• / •
USB Audio	•
FM / AM Tuner	• / •
Bluetooth	•
HDMI	
4K 60Hz 4:4:4 resolution / HDCP 2.2	• / •
Dolby Vision compatible / Hybrid Log Gamma (HLG)	• / •
HDMI pass through on stand-by	•
3D video pass through	•
Video conversion	CVBS / HDMI; Comp / HDMI
Videoprocessing and -scaling	1080p, 4K 30/25/24Hz

* This feature is not available in all countries.

D&M Europe B.V.
A Division of Sound United
Beemdstraat 11
5653 MA Eindhoven
The Netherlands

INPUTS/OUTPUTS	
VIDEO	
Composite In / Out	2+1 / 1
Component In / Out	2 / 1
HDMI In / Out	7+1 / 2
AUDIO	
Analogue In / Out	4+1 / 0
Digital Optical In	2
Digital Coaxial In	2
Multichannel Pre Out	• (7.2ch)
Zone audio preout	•
Subwoofer Out	2
7.1 Multichannel input	•
SPECIFICATIONS	
Number of poweramps	7
Power Output per channel	
6 ohm, 1 kHz, 1%, 1ch Drive	180 W
6 ohm, 1 kHz, 0.7%, 2ch Drive	140 W
8 ohm, 20 Hz - 20 kHz, 0.08%, 2ch Drive	100 W
Audio Signal to Noise Ratio	100 dB
GENERAL	
Available colours: Black / Silver-Gold	• / •
System Remote Control	RC035SR
Power Consumption in W	650
Power Consumption No-Sound (ECO ...on/off) in W	45 / 75
Standby Consumption in W	0.2 (with CEC 0.5)
Maximum Dimensions (W x D x H) in mm	440 x 346 x 161
Weight in kg	10.0
EAN	
EU	SR5013/N1B 4951035065198 Black
	SR5013/N1SG 4951035065204 Silvergold
UK	SR5013/T1B 4951035066508 Black
	SR5013/T1SG 4951035066515 Silvergold

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by D&M Holdings Inc. is under license. Dolby, Dolby Atmos, and the double-D symbol are trademarks of Dolby Laboratories. DTS, the Symbol, DTS in combination with the Symbol, DTS:X, and the DTS:X logo are registered trademarks or trademarks of DTS, Inc. in the United States and/or other countries. The Spotify software is subject to third party licenses found here: www.spotify.com/connect/third-party-licenses. Other trademarks and trade names are those of their respective owners. Marantz is a trademark or registered trademark of D&M Holdings, Inc.

* All specs can be subject to change.